


APP	120.305	Eelde Approach
TWR	118.705	Eelde Tower
	119.705	
ATIS	133.555	Eelde Information
	121.500	General Emergency

**TRANSITION LEVEL BY ATC**  
TRANSITION ALTITUDE 3000 FT AMSL

- Missed Approach:
  - Track 050° MAG and climb to 2000 FT AMSL. Inform ATC.
- Missed Approach in case of communication failure:
  - Track 050° MAG and climb to 3000 FT AMSL;
  - When reaching 3000 FT AMSL turn left to intercept EEL 229 and proceed to OMFAR.
  - After arriving over OMFAR hold or descend to 2000 FT AMSL in an outbound turn, intercept final approach and execute the instrument approach procedure again.

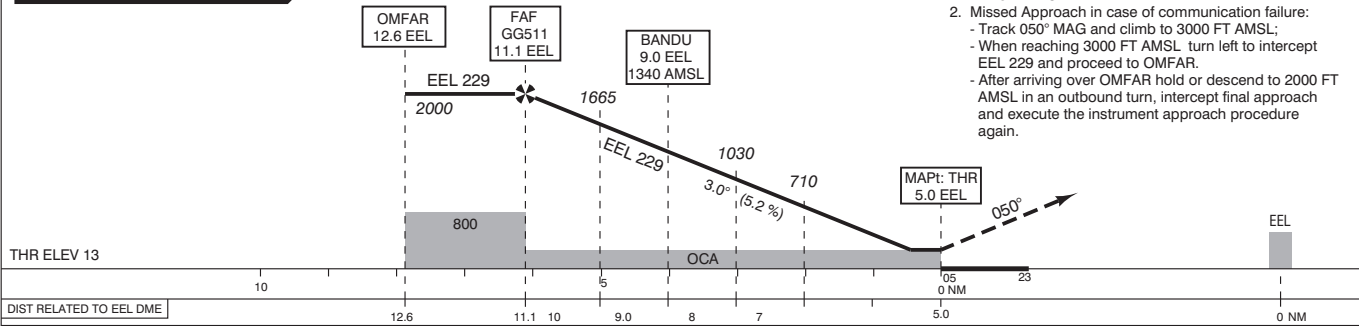

DIST RELATED TO EEL DME		10	12.6	11.1	10	9.0	8	7	5.0	0 NM	
GS IN KT		60	80	100	120	140	160	180			
VERTICAL SPEED		320 FT/MIN	425 FT/MIN	530 FT/MIN	635 FT/MIN	745 FT/MIN	850 FT/MIN	955 FT/MIN			
OCA (OCH) ELEV THR 05: 13.3 FT										MSA BASED ON EEL VOR/DME	
ACFT CAT	VOR MAPt: THR	CIRCLING*		* Circling approaches shall be executed south-east of the AD, unless otherwise instructed by ATC.		THR 05 530639.9N 0063339.2E		530252.1N 0062546.7E			
A	440 (422)	450 (432)									
B		520 (502)									
C		620 (602)									
D		850 (832)									
CEILING AND VISIBILITY MINIMA											
TAKE-OFF	DAY:	NA		NIGHT:		NA		DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET			
LANDING	DAY:	NA		NIGHT:		NA					